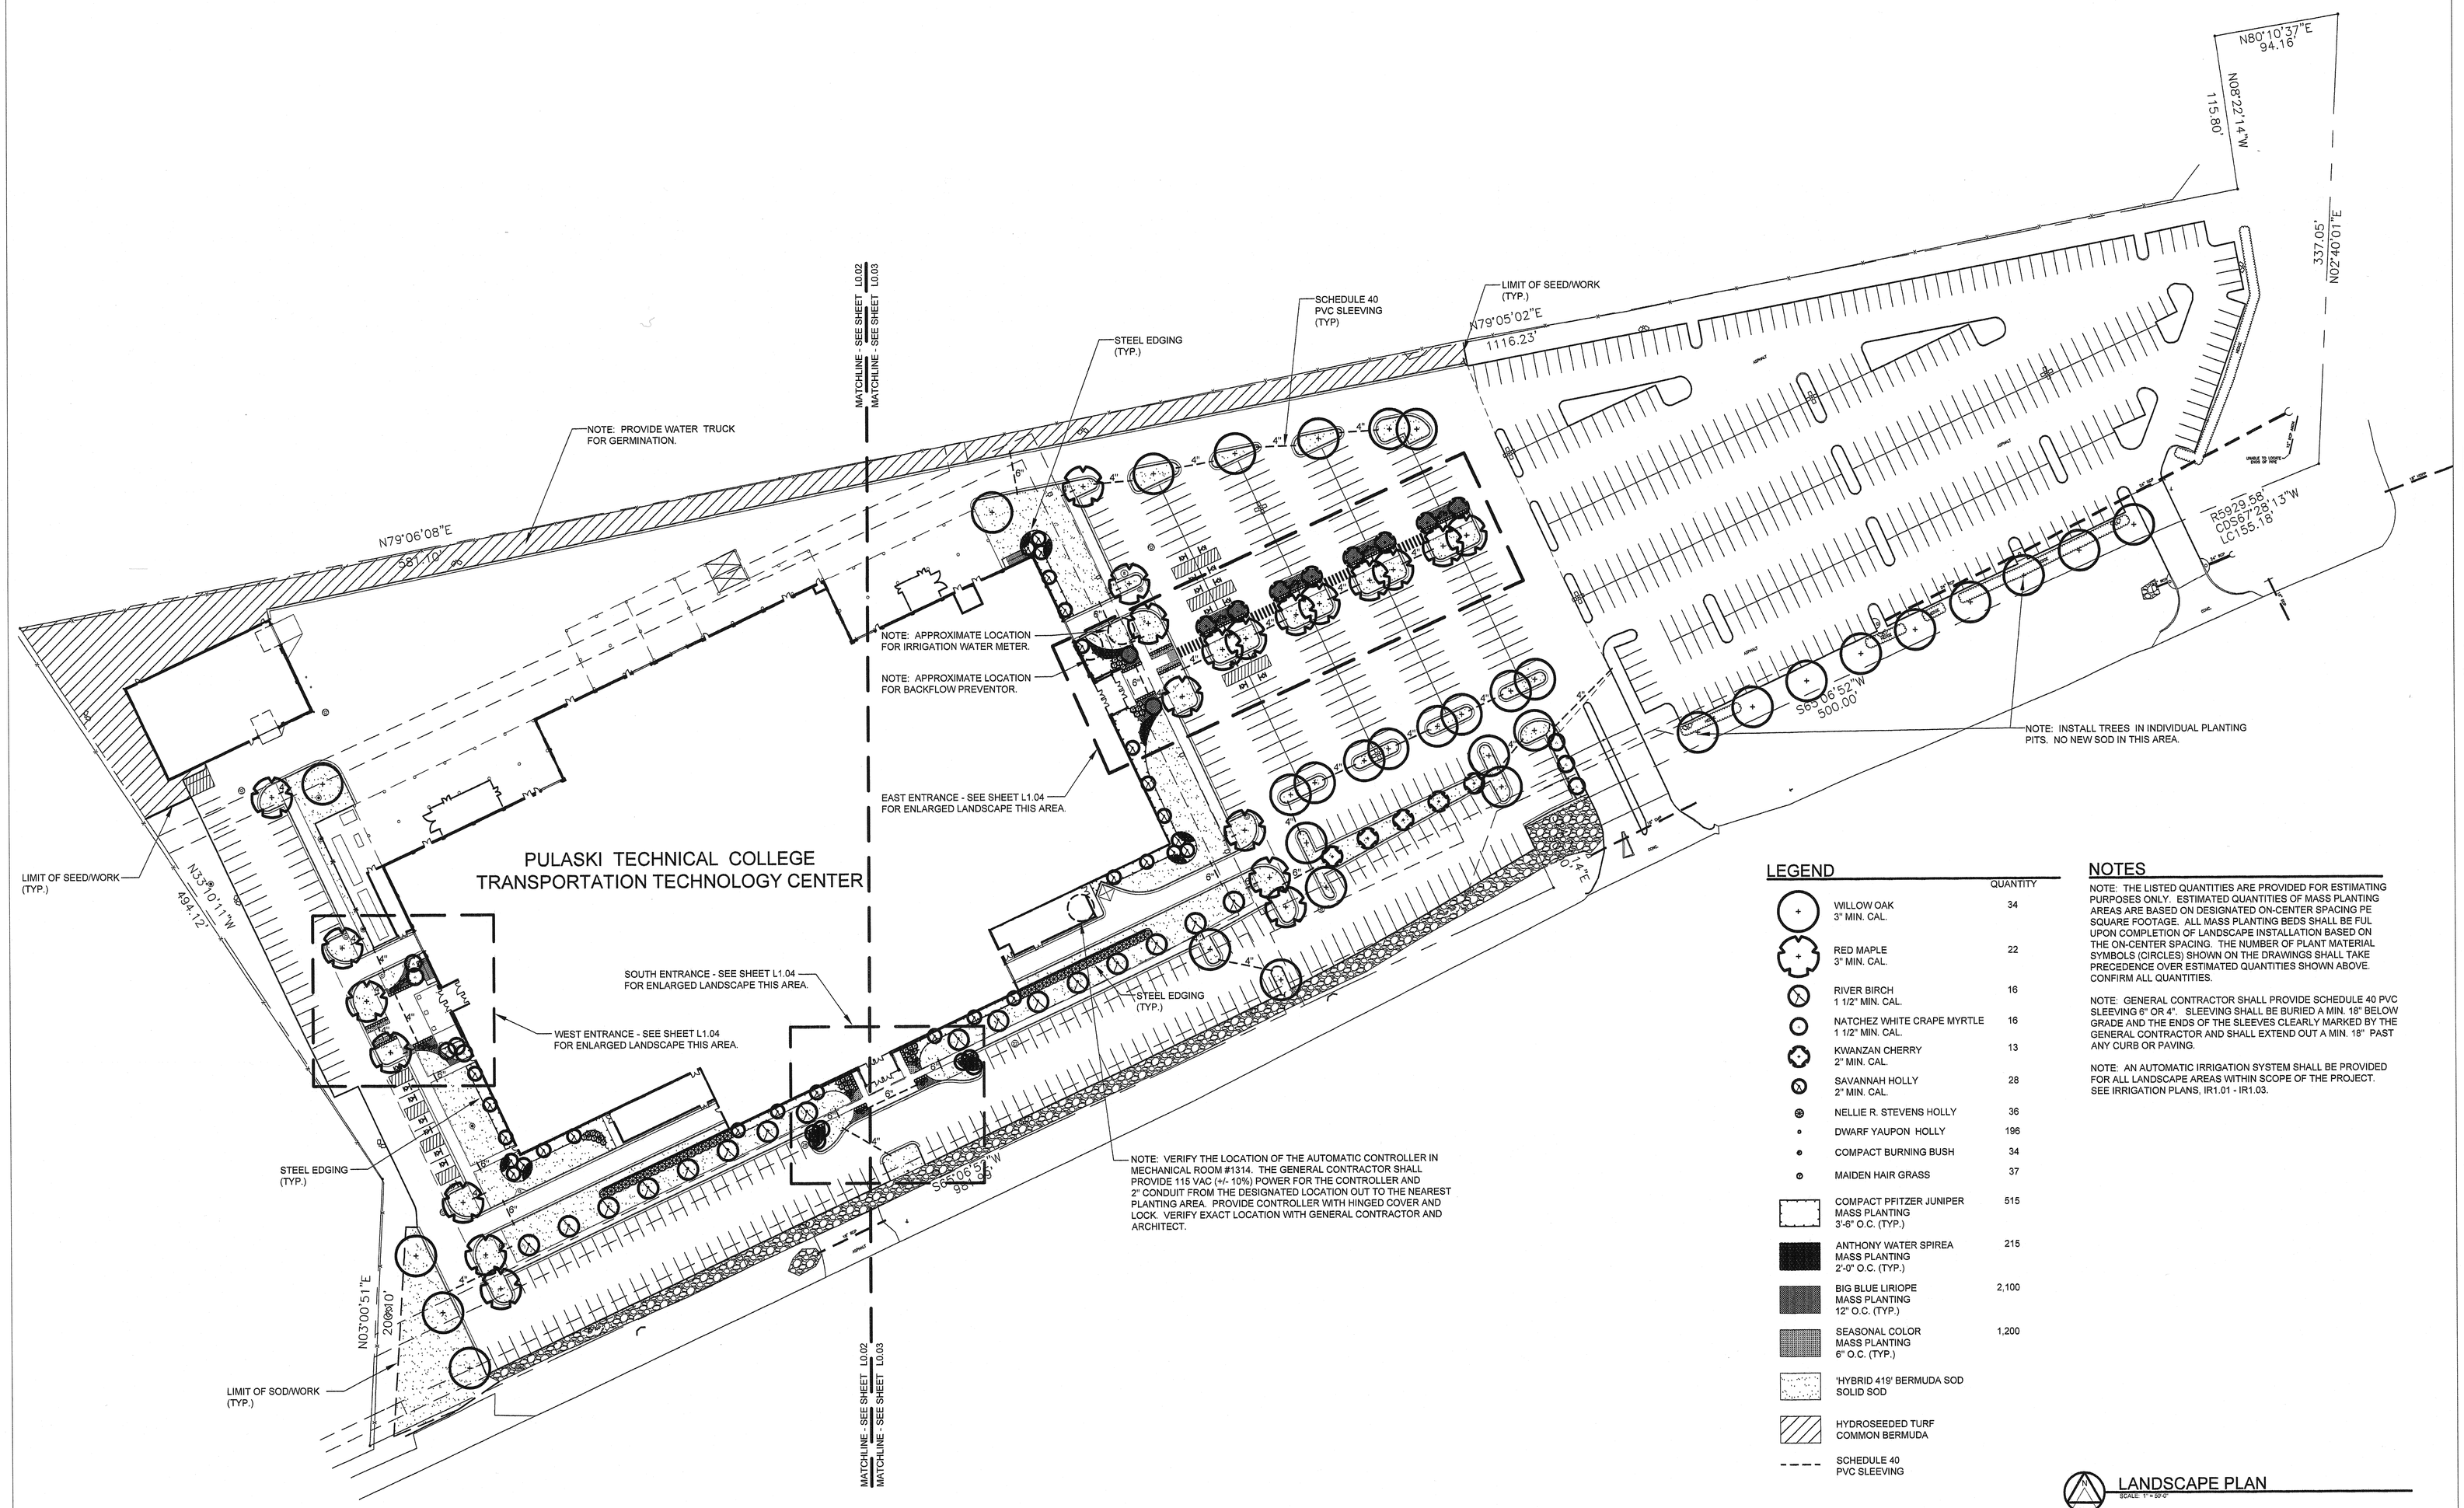

LEGEND

	QUANTITY
WILLOW OAK 3" MIN. CAL.	34
RED MAPLE 3" MIN. CAL.	22
RIVER BIRCH 1 1/2" MIN. CAL.	16
NATCHEZ WHITE CRAPE MYRTLE 1 1/2" MIN. CAL.	16
KWANZAN CHERRY 2" MIN. CAL.	13
SAVANNAH HOLLY 2" MIN. CAL.	28
NELLIE R. STEVENS HOLLY	36
DWARF YAUPON HOLLY	196
COMPACT BURNING BUSH	34
MAIDEN HAIR GRASS	37
COMPACT PFITZER JUNIPER MASS PLANTING 3'-6" O.C. (TYP.)	515
ANTHONY WATER SPIREA MASS PLANTING 2'-0" O.C. (TYP.)	215
BIG BLUE LIRIOPE MASS PLANTING 12" O.C. (TYP.)	2,100
SEASONAL COLOR MASS PLANTING 6" O.C. (TYP.)	1,200
'HYBRID 419' BERMUDA SOD SOLID SOD	
HYDROSEEDED TURF COMMON BERMUDA	
SCHEDULE 40 PVC SLEEVING	

NOTES

NOTE: THE LISTED QUANTITIES ARE PROVIDED FOR ESTIMATING PURPOSES ONLY. ESTIMATED QUANTITIES OF MASS PLANTING AREAS ARE BASED ON DESIGNATED ON-CENTER SPACING PE SQUARE FOOTAGE. ALL MASS PLANTING BEDS SHALL BE FUL UPON COMPLETION OF LANDSCAPE INSTALLATION BASED ON THE ON-CENTER SPACING. THE NUMBER OF PLANT MATERIAL SYMBOLS (CIRCLES) SHOWN ON THE DRAWINGS SHALL TAKE PRECEDENCE OVER ESTIMATED QUANTITIES SHOWN ABOVE. CONFIRM ALL QUANTITIES.

NOTE: GENERAL CONTRACTOR SHALL PROVIDE SCHEDULE 40 PVC SLEEVING 6" OR 4". SLEEVING SHALL BE BURIED A MIN. 18" BELOW GRADE AND THE ENDS OF THE SLEEVES CLEARLY MARKED BY THE GENERAL CONTRACTOR AND SHALL EXTEND OUT A MIN. 18" PAST ANY CURB OR PAVING.

NOTE: AN AUTOMATIC IRRIGATION SYSTEM SHALL BE PROVIDED FOR ALL LANDSCAPE AREAS WITHIN SCOPE OF THE PROJECT. SEE IRRIGATION PLANS, IR1.01 - IR1.03.

LANDSCAPE PLAN

SCALE: 1" = 20'-0"

TAGGART FOSTER CURRENCE GRAY ARCHITECTS

TAGGART•FOSTER•CURRENCE•GRAY ARCHITECTS, INC.

4500 Burrow Drive
North Little Rock, AR 72116
Phone: 501-758-7443
Fax: 501-753-7309

www.taggarch.com

PULASKI TECHNICAL COLLEGE

TRANSPORTATION TECHNOLOGY CENTER

13000 INTERSTATE 30
LITTLE ROCK,
ARKANSAS

PROJECT NAME

REGISTERED LANDSCAPE ARCHITECT — MICHAEL L. CARTER — 7 — STATE OF ARKANSAS

SEAL

REVISIONS

REVISION NUMBER

REVISION NUMBER

REVISION NUMBER

REVISION NUMBER

REVISION NUMBER

DATE AUG 13, 2007

PROJECT NUMBER 39604

DRAWING NUMBER L1.01